

Featured Products



Wind-Free™ 1-Way Cassette

Wind-Free Technology

Wind-Free™ Cooling is some of Samsung's most advanced technology. The Wind-Free™ 1-Way Cassette pushes air out through tiny holes in the panel, dispersing a gentle flow of air. These 13,000 micro holes are paramount in creating a kind of airflow called still air*, which cools the room gradually and noticeably with no draughts.

* ASHRAE (American Society of Heating, Refrigeration, and Air-Conditioning Engineers) defines "Still Air" as air currents moving at speeds below 0.15m/s, which lacks the presence of cold draughts



Slim Installation/Small Footprint

At a height of only 135mm¹, the Wind-Free™ 1-Way Cassette is a compact and lightweight device (8-13.5kg²). This slim design makes it not only visually pleasing, but also easier to install and maintain, and it can be fitted in the smallest of ceiling gaps.

¹ Up to 3.6kW, larger models measure 138mm
² 1.7kW & 2.2kW models measure 8kg, 5.6kW & 7.1kW measure 13.5kg

Wider Cooling Range

The larger and optimised blade works to cool a larger area much faster. Its sleek design can deliver cool air efficiently up to 8m* and offers rapid and even cooling, with no zone left untouched.

* Based on the 7.1kW indoor unit.

→ For Multi Split (FJM) please see: Page 3.28

Specifications



Wind-Free™ 1-Way Cassette R32 NEW

Indoor Unit			AC026RN1DKG/EU	AC035RN1DKG/EU
Outdoor Unit- Mono-Phase			AC026RXADKG/EU	AC035RXADKG/EU
Outdoor Unit- Tri-Phase				
Capacity				
	Cooling (Min/Nominal/Max)	kW	0.82 / 2.60 / 3.80	0.85 / 3.50 / 4.20
	Heating up to +7°C (Min/Nominal/Max)	kW	0.98 / 3.30 / 4.40	1.00 / 4.00 / 5.00
	Heating @ -5°C	kW	3.2	3.9
	Heating @ -15°C	kW	2.9	2.8
Performance				
Energy Efficiency Cooling	SEER	W/W	6.4 / A++	6.2 / A++
	Consumption	kWh/a	142	198
	Pdesignc	kW	2.6	3.5
	EER	W/W	3.61	3.21
Energy Efficiency Heating	SCOP	W/W	4.0 / A+	4.0 / A+
	Consumption	kWh/a	700	700
	Pdesignh (average)	kW	2.0	2.0
	COP	W/W	3.26	3.12
AirFlow Rate	Indoor Unit (High/Mid/Low)	m ³ /min	7.3 / 6.5 / 5.8	9.0 / 8.2 / 7.2
Sound Power	Indoor Unit	dB(A)	52	55
	Outdoor Unit	dB(A)	59	61
Sound Pressure	Indoor Unit (Silent/Low/Mid/High)	dB(A)	25 / 26 / 29 / 32	28 / 29 / 32 / 35
	Outdoor Unit	dB(A)	46 / 47	48 / 48
Fan/ Outdoor unit	Type		Crossflow Fan	Crossflow Fan
	Power	W	27	27
	Number	EA	1	1
External Static Pressure	Min / Std / Max	Pa		
Operating Temp. Range	Cooling	°C	-15 ~ 46	-15 ~ 46
	Heating	°C	-20 ~ 24	-20 ~ 24
Electrical Data				
Power Source	Indoor Unit	V / Hz / Φ / #	220~240/ 50/1/ 2	220~240/ 50/1/ 2
	Outdoor Unit 1P	V / Hz / Φ / #	220~240/ 50/1/ 2	220~240/ 50/1/ 2
	Outdoor Unit 3P	V / Hz / Φ / #		
Compressor Type	Outdoor Unit	Type	Single BLDC	Single BLDC
Power (Min/Nominal/Max)	Cooling	kW	0.17 / 0.72 / 1.16	0.18 / 1.09 / 1.40
	Heating	kW	0.20 / 1.01 / 1.45	0.19 / 1.28 / 1.80
Current Input	Cooling (Min/Std/Max)	A	1.2 / 3.8 / 5.4	1.6 / 5.3 / 7.5
	Heating (Min/Std/Max)	A	1.4 / 5.0 / 7.0	1.3 / 6.2 / 10.5
	Cooling- Tri-Phase (Min/Std/Max)	A		
	Heating- Tri-Phase (Min/Std/Max)	A		
Dimensions				
Net Dimensions (W x H x D)	Indoor Unit	mm	970 x 135 x 410	970 x 135 x 410
	Outdoor Unit	mm	790 x 548 x 285	790 x 548 x 285
Net Weight	Indoor Unit	kg	9.2	9.2
	Outdoor Unit	kg	32.5	32.5
Refrigerant				
Refrigerant	Type		R32(Contains fluorinated greenhouse gases. GWP=675)	
	Factory charging	kg	0.9 / 20m	0.9 / 20
	Charging Ton equivalent CO2	tCO2e	0.61 tCO2e	0.61 tCO2e
	Additional refrigerant charging	g / m	-	-
Piping Connections	Liquid Pipe	Φ.inch	1 / 4	1 / 4
	Gas Pipe	Φ.inch	3 / 8	3 / 8
Piping Length	Min/ Max	m	3 / 20	3 / 20
Piping Height	Max	m	15	15
Piping Connections	Drain pipe	Φ.mm	ID 18	ID 18
Others				
Panel	Model code		PC1NWFMAN	PC1NWFMAN
	Net Dimensions (W x H x D)	mm	1198 x 35 x 500	1198 x 35 x 500
	Net Weight	kg	4.3	4.3
Accessories	Drain pump		included	included
	Max lifting height/ displacement	mm / l/h	750/24	750/24

- 2-StepCooling – FastCooling & Wind-Free™ Cooling.
- Blade angle between 37° and 87°, Blade width 100mm.
- Built-in humidity sensor.

- Height of only 135 mm.
- Built-in condensation drain pump (750 mmH2O).

Accessories					
Individual Controllers (Optional)			Others (Optional)		
AR-EH05E	MWR-SH00N	MWR-SH11N	MWR-WE15N	PC1NWFMAN	MRW-TA

SUNG

13784671

Learn more about Samsung Climate Solutions at: www.samsung.com/climate

Copyright © 2018 Samsung Electronics Air Conditioner B.V. All rights reserved. Samsung is a registered trademark of Samsung Electronics Co., Ltd. Specifications and designs are subject to change without notice and may include preliminary information. Nonmetric weights and measurements are approximate. All data were deemed correct at time of creation. Samsung is not liable for errors or omissions. All brand, product, service names and logos are trademarks and/or registered trademarks of their respective owners and are hereby recognized and acknowledged.


Samsung Electronics Air Conditioner Europe B.V.

Evert van de Beekstraat 310, 1118 CX Schiphol • P.O. Box 75810, 1118 ZZ Schiphol • +31 (0)8 81 41 61 00 • Netherlands

Dimensional Drawings

Wind-Free™ 1-Way Cassette


AC0026/035RN1DKG/EU

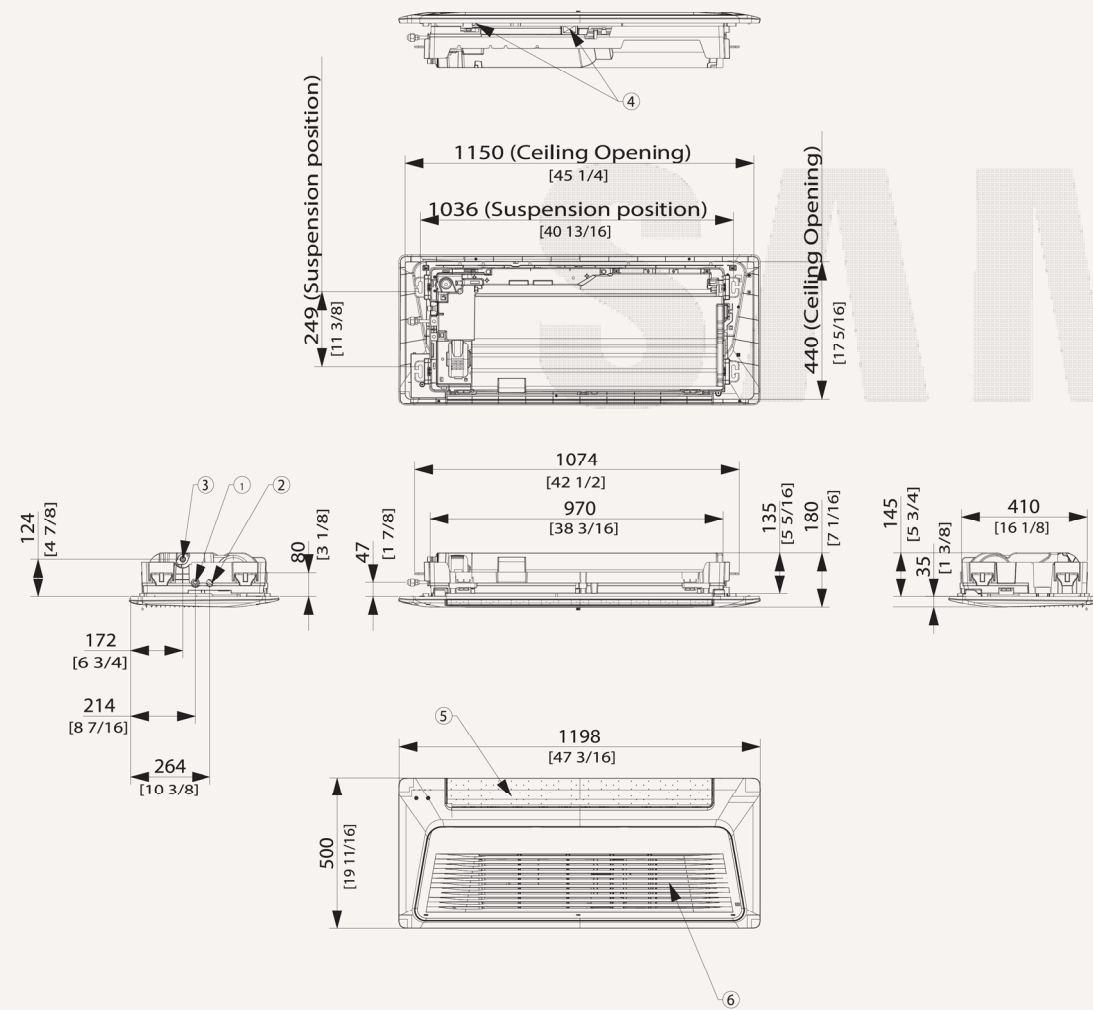

No.	Name	Description
1	Gas pipe connection	Ø9.52 (3/8")
2	Liquid pipe connection	Ø6.35 (1/4")
3	Drain hose connection	VP20 (OD26, ID20)
4	Power supply/Communication wiring conduit	-
5	Air outlet louver	-
6	Air inlet grille	-

1-Way Cassette

AC026/035MN1DKH/EU

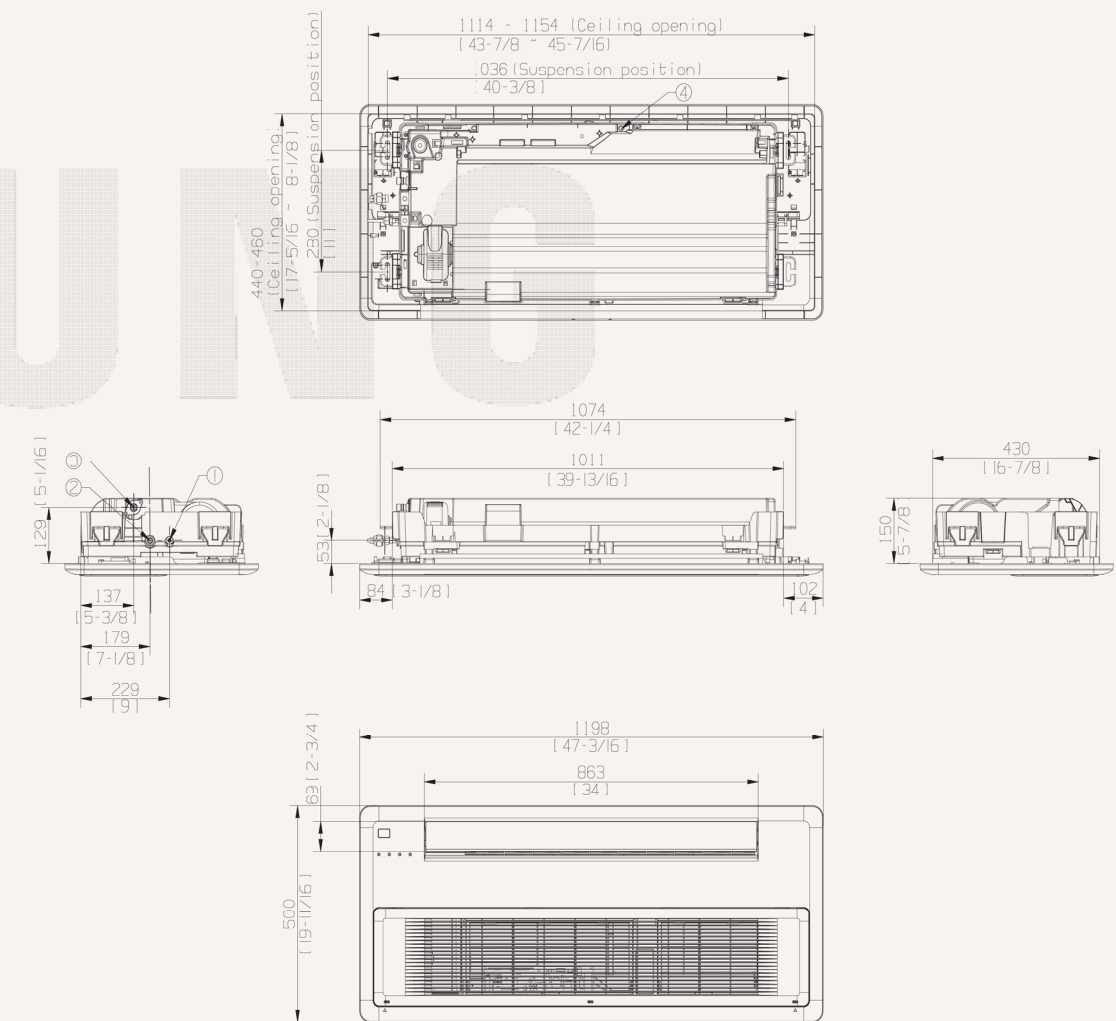

No.	Name	Description
1	Liquid pipe connection	Ø6.35(1/4)
2	Gas pipe connection	Ø9.52(3/8)
3	Drain pipe connection	VP-20(OD26, ID20)
4	Power supply & Communication wiring conduit	-